

POLYVANTIS

ACRYLITE® Films
for Traffic Control Materials

Agenda

ACRYLITE® Films for Traffic Control Materials

- Market Trends, Customer Needs and Our Solution
- Product Matrix

Applications and Product Overview

- Product Portfolio
- Commercial Information



ACRYLITE®
Films
Excellent
solution for
Traffic Control
Materials

POLYVANTIS

MARKET TRENDS / CUSTOMER NEEDS

TECHNICAL AND QUALITY ASPECTS

MARKET TREND	OUR SOLUTION
Excellent Optical Properties	Outstanding transparency and color brilliance High quality laminates can also be achieved using ACRYLITE® TCM Film and other polymeric substrates such as PET, PC and PVC, with the help of pressure sensitive adhesives (PSA) or solvent based adhesives
Signal Colors	Tailor-made colors according to international standards such as EN 12899-1, DIN 6171-1, ASTM D4956, GB/T 18833, GOST R 52290, and SANS 5549
Weathering and UV Resistance	UV protection with up to 10 years of standard outdoor durability; resistant to yellowing and fading
Printability	Suitable for digital and gravure printing
High Compatibility with Reflective Systems	Suitable for use with: Glass bead reflection systems (e.g., construction site signage), Prismatic reflective films (e.g., road and highway signs)
Flexible Processing Options	good behavior in all printing technologies such as gravure, flexography and digital printing, any pre-treatment or primers are not required
Sustainable Material	PMMA is long-lasting and recyclable , offering an environmentally friendly alternative to PVC-based films

MARKET TRENDS / CUSTOMER NEEDS

PORTFOLIO AND SERVICE ASPECTS

MARKET TREND		OUR SOLUTION
Flexibility in size		ACRYLITE® films can be cut-to-size or die cut guarantee best flexibility
Technical support		Long years of experience in producing ACRYLITE® clear and colored films, Guarantees the best technical support
Flexibility for needs; product development		Production facilities in combination with excellent experience allow support and development of new projects

PRODUCT MATRIX

Benefits

- Outstanding transparency and color brilliance
- UV resistance with up to 10 years' durability
- Wide color range
- Made from impact-modified PMMA for high strength and durability
- Compatible with both glass bead and prismatic reflective systems
- Ideal for digital and gravure printing and customized signage

* new grades

POLYVANTIS

	ACRYLITE® film grades							
	OF014 OF016 OF072 OF096 OF097	1F006 1F011*	2F005 2F006*	3F005	5F008 5F011*	6F004 6F006*	8F003	9F002
Description / colour	colorless	yellow	orange	red	blue	green	brown	black
Thickness / distribution	75 µm	75 µm	75 µm	75 µm	75 µm	75 µm	75 µm	75 µm
Production width	Up to 1270 mm	Up to 1270 mm	Up to 1270 mm	Up to 1270 mm	Up to 1270 mm	Up to 1270 mm	Up to 1270 mm	Up to 1270 mm
Mono / multilayer film	Mono layer film	Mono layer film	Mono layer film	Mono layer film	Mono layer film	Mono layer film	Mono layer film	Mono layer film
UV protection	Standard (10 years)	Standard (10 years)	Standard (10 years)	Standard (10 years)	Standard (10 years)	Standard (10 years)	Standard (10 years)	Standard (10 years)
Main layer	Impact modified PMMA + UV MB	Impact modified PMMA + UV + color MB	Impact modified PMMA + UV + color MB	Impact modified PMMA + UV + color MB	Impact modified PMMA + UV + color MB	Impact modified PMMA + UV + color MB	Impact modified PMMA + UV + color MB	Impact modified PMMA + UV + color MB



ACRYLITE®
Films
Applications
and Product
Matrix

PRODUCT OVERVIEW

COLORED FILMS

	ACRYLITE® Film 1F004, 1F006	ACRYLITE® Film 2F005, 2F006	ACRYLITE® Film 3F005	ACRYLITE® Film 5F008, 5F011	ACRYLITE® Film 6F004, 6F006	ACRYLITE® Film 8F003	ACRYLITE® Film 9F002
Description / color	yellow	orange	red	blue	green	brown	black
Thickness / distribution	75 µm	75 µm	75 µm	75 µm	75 µm	75 µm	75 µm
Production width	Up to 1270 mm	Up to 1270 mm	Up to 1270 mm	Up to 1270 mm	Up to 1270 mm	Up to 1270 mm	Up to 1270 mm
Mono / multilayer film	Mono layer film	Mono layer film	Mono layer film	Mono layer film	Mono layer film	Mono layer film	Mono layer film
UV protection	Standard (10 years)	Standard (10 years)	Standard (10 years)	Standard (10 years)	Standard (10 years)	Standard (10 years)	Standard (10 years)
Main layer	Impact modified PMMA + UV + color MB	Impact modified PMMA + UV + color MB	Impact modified PMMA + UV + color MB	Impact modified PMMA + UV + color MB	Impact modified PMMA + UV + color MB	Impact modified PMMA + UV + color MB	Impact modified PMMA + UV + color MB

TRAFFIC CONTROL MATERIAL (TCM) APPLICATIONS



TRAFFIC CONTROL MATERIAL (TCM) APPLICATIONS



Applications:
Road signs

TRAFFIC CONTROL MATERIAL (TCM) APPLICATIONS

Applications:
Temporary signs for
construction zones




TRAFFIC CONTROL MATERIAL (TCM) APPLICATIONS



Applications:
Reflective sign on special vehicle

TRAFFIC CONTROL MATERIAL (TCM) APPLICATIONS

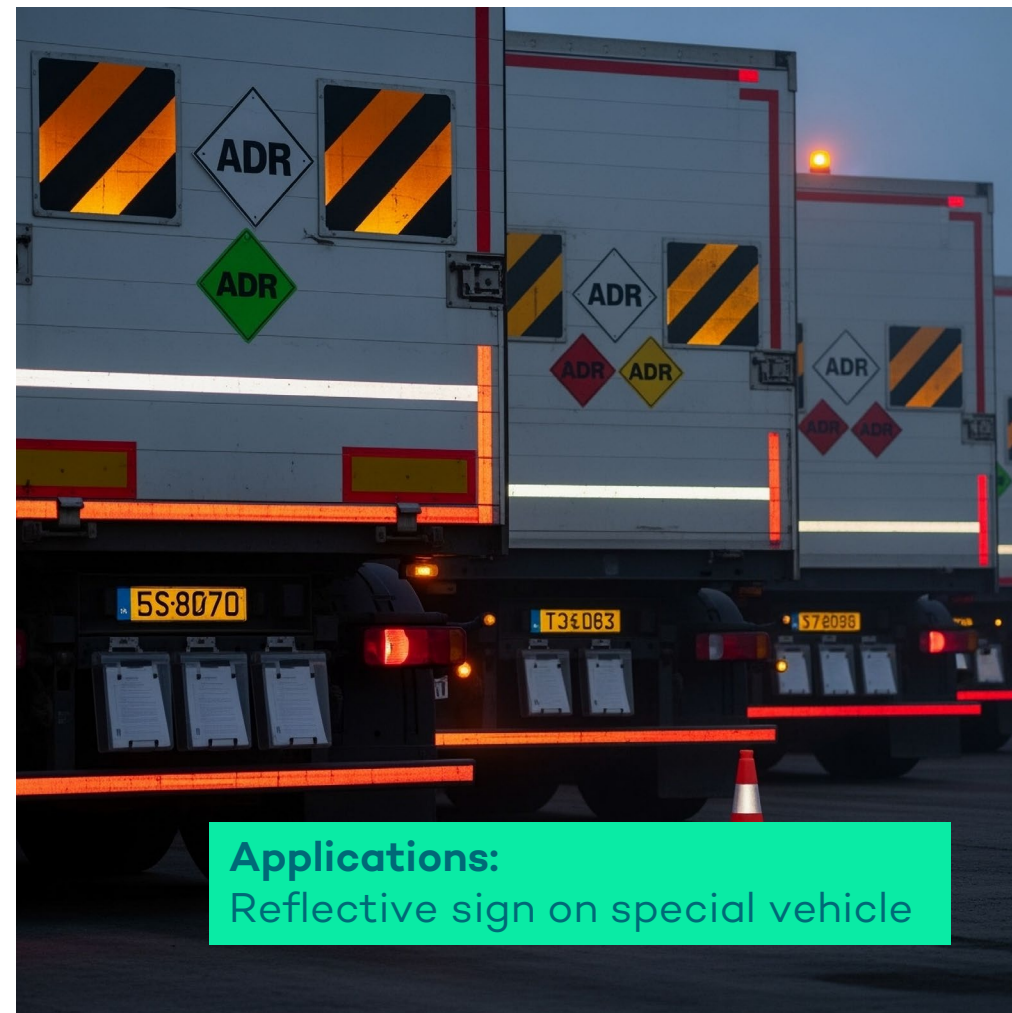

PRODUCT OVERVIEW

COLORLESS FILMS

	ACRYLITE® Film OF014	ACRYLITE® Film OF016	ACRYLITE® Film OF072	ACRYLTIE® Film OF096	ACRYLITE® Film OF097
Description / color	High impact modified PMMA + low UV MB	Impact modified PMMA + middle UV MB	Impact modified PMMA + middle UV MB + good winding quality	Very high Impact modified PMMA + middle UV MB	Impact modified PMMA + middle UV MB
Thickness / distribution	75 µm	75 µm	75 µm	75 µm	75 µm
Production width	Up to 1270 mm	Up to 1270 mm	Up to 1270 mm	Up to 1270 mm	Up to 1270 mm
Mono / multilayer film	Mono layer film	Mono layer film	Mono layer film	Mono layer film	Mono layer film
UV protection	Standard (8 years)	Standard (10 years)	Standard (10 years)	Standard (10 years)	Standard (10 years)
Haze	< 1%	< 1%	2.6	4.5	3
Stress whitening	No	No	Yes	Yes	Yes

POLYVANTIS