


ACRYLITE® Heatstop Wave Profile Acrylic Sheet

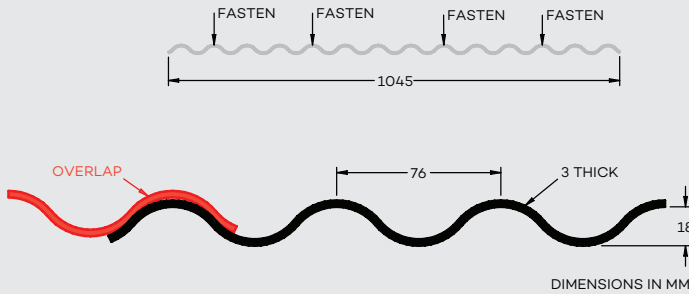

Product

ACRYLITE® Heatstop high impact wave profile is an IR-(infrared) reflecting, heat insulating and highly weather-resistant sheet made of impact-modified acrylic (polymethyl methacrylate, PMMA) polymer. The Heatstop component is uniformly distributed throughout the entire sheet.

Features and Benefits

- Reflects IR radiation resulting in reduced heat build up.
- Solar energy is reduced up to 75%.
- Transmitted light results in a cool blue white interior sheet color, making a very pleasant and bright environment beneath the glazing.
- Excellent protection against harmful UV radiation.
- Quick and easy to fabricate and install using simple tools.
- Can be point fastened. Special weatherseal calottes and fasteners are recommended.
- High impact resistance prevents damage during transportation and installation.
- Thicker than many other corrugated sheets resulting in high inherent rigidity and load-bearing capacity.

Warranties

Non-prorated, full replacement 10 year light transmission and 10 year hail warranty. For details see published warranty.


Applications

Suitable for sloped and vertical applications including the following:

- Patio & Deck Covers
- Sunrooms & Winter Gardens
- Pool & Spa Enclosures
- Windbreaks
- Carports
- Canopies
- Decorative Panels
- Partition Walls

Fabrication and Installation

Please refer to *ACRYLITE® Wave Profile Installation Guidelines* for further details.

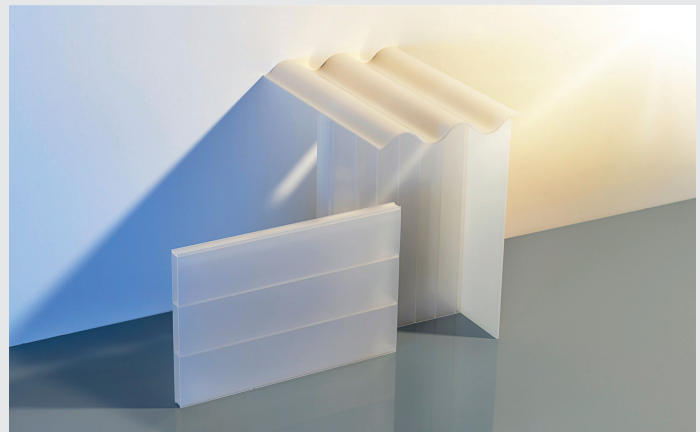

ACRYLITE® Heatstop Wave Profile Acrylic Sheet

ACRYLITE®

Product Specifications

ACRYLITE® Heatstop high impact wave profile is available to ship from our US warehouse and from our production facility in Germany.

| Color | Length | Width | Thickness |
|-----------------|-----------|------------------|-----------|
| Cool Blue White | up to 16' | 41.14" (1045 mm) | 3 mm |

Thanks to its special technology, ACRYLITE® Heatstop high impact wave profile effectively reduces the sun's heat radiation. The color impression may change depending on viewing angle and lighting conditions.

Properties

| Light transmission (TD65) | |
|---------------------------------------|-----------------------------------|
| Cool Blue White · WZ006 · 3mm | up to 24 % |
| Other technical data | |
| Expansion due to heat and moisture | 6mm/m (1/16"/ft) |
| Max. service temperature without load | 70 °C (160 °F) |
| Weighted sound reduction index | 22 dB |
| Area weight | 0.7 lb/ft ² |
| ASTM D-365 (Rate of Burn) | C2/CC2 |
| ASTM D-1929 (Self Ignition Temp) | 750 ° F |
| ASTM D-2843 (Smoke Density Rating) | 3.8 % |
| CAN/ULC S102.2 | < 150 Flame Spread Classification |
| DIN 4102 | B2 |

Values are approximate.

Environmental Sustainability

ACRYLITE® Heatstop high impact wave profile sheets are built to last using environmentally sound manufacturing processes in facilities that have received ISO-14001 environmental certification. The sheet has been proven to perform consistently over decades of use in all types of climates throughout the world. ACRYLITE® acrylic's long service life means less replacement costs when compared to inferior glazing materials that must be replaced more frequently, often after just a few years of use. In addition, if the time does come for replacement, ACRYLITE® can be recycled in an environmentally friendly manner.

FIRE BEHAVIOR

The fire behavior of ACRYLITE® is rated as C2 or CC2 according to ASTM D-635. ACRYLITE® burns almost entirely without smoke according to DIN4102 and ASTM D-2843 and is easily extinguished. The smoke gases produced by ACRYLITE® are neither acutely toxic according to DIN 53436, nor corrosive according to DIN VDE 0482-267.

LOAD BEARING CAPACITY

Due to its excellent rigidity and inherent strength, large areas can be glazed quickly and efficiently. ACRYLITE® Heatstop high impact wave profile with pointwise fastening, require cross-members at the spacings shown in the following table.

| ACRYLITE® Heatstop Wave Profile Installed at full width of 1,045 mm – 41.14" | |
|---|-------------------------|
| Load (lb/ft ²) | Support Spacing (in) |
| 4 | 67 |
| 8 | 47 |
| 12 | 40 |
| 15 | 31 |
| 20 | 29 |
| 25 | 26 |
| 30 | 23 |
| 35 | 18 |
| 40 | 14 |

Please refer to *ACRYLITE® Wave Profile Installation Guidelines* for further details. Refer to local building codes to determine the applicability of these values to specific applications.



ACRYLITE® Heatstop

Wave Profile Acrylic Sheet

ACRYLITE®

Roehm America LLC
Acrylic Products

1796 Main Street
Sanford, ME 04073
USA

www.acrylite.co
www.roehm.com

1-855-202-7467
info@acrylite.co

Röhm GmbH and its affiliates are a worldwide manufacturer of PMMA products sold under the PLEXIGLAS® trademark on the European, Asian, African and Australian continents and under the ACRYLITE® trademark in the Americas.

Fire Precautions

ACRYLITE® sheet is a combustible thermoplastic. Precautions should be taken to protect this material from flames and high heat sources. ACRYLITE® sheet usually burns rapidly to completion if not extinguished. The products of combustion, if sufficient air is present, are carbon dioxide and water. However, in many fires sufficient air will not be available and toxic carbon monoxide will be formed, as it will when other common combustible materials are burned. We urge good judgement in the use of this versatile material and recommend that building codes be followed carefully to assure it is used properly.

Compatibility

Like other plastic materials, ACRYLITE® sheet is subject to crazing, cracking or discoloration if brought into contact with incompatible materials. These materials may include cleaners, polishes, adhesives, sealants, gasketing or packaging materials, cutting emulsions, etc. See the Tech Briefs in this series for more information, or contact your ACRYLITE® sheet Distributor for information on a specific product.

This information and all further technical advice is based on our present knowledge and experience. However, it implies no liability or other legal responsibility on our part, including with regard to existing third party intellectual property rights, especially patent rights. In particular, no warranty, whether expressed or implied, or guarantee of product properties in the legal sense is intended or implied. We reserve the right to make any changes according to technical progress or further developments. The customer is not released from the obligation to conduct careful inspection and testing of incoming goods. Performance of the product described herein should be verified by testing, which should be carried out only by qualified experts in the sole responsibility of a customer. Reference to trade names used by other companies is neither a recommendation, nor does it imply that similar products should be used.